


# **Boeing 727-200**

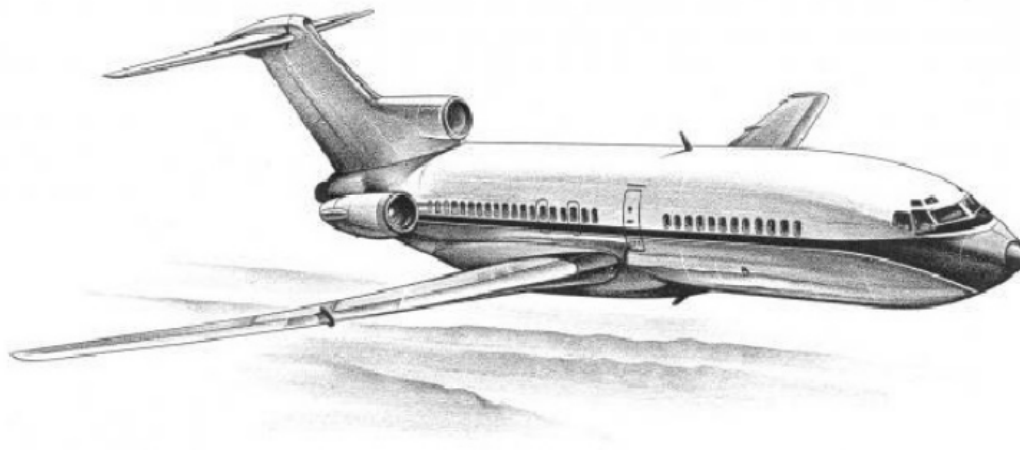

## **Performance Handbook**

**This document may only be used for training purposes.**

All rights reserved. Copies of this publication may be reproduced as training material for students, for use within a company or organization, or for personal use, but may not otherwise be reproduced for publication or for commercial gain.

Boeing 727-200 Performance Handbook

**AIRPLANE LIMITATIONS AND GENERAL PERFORMANCE**

**Stall Speeds**

These tables present the Stall Speeds and the Stick Shaker Speeds as a function of gross weight and flap setting.

| <b>Stall Speeds</b>           |              |     |     |     |     |     |
|-------------------------------|--------------|-----|-----|-----|-----|-----|
| Gross Weight<br>pounds x 1000 | Flap Setting |     |     |     |     |     |
|                               | up           | 5   | 15  | 25  | 30  | 40  |
| Stall Speed KIAS              |              |     |     |     |     |     |
| 170                           | 163          | 130 | 121 | 111 | 107 | 110 |
| 165                           | 160          | 128 | 118 | 109 | 106 | 108 |
| 160                           | 157          | 125 | 116 | 107 | 104 | 105 |
| 155                           | 154          | 123 | 114 | 105 | 102 | 102 |
| 150                           | 151          | 121 | 112 | 103 | 100 | 100 |
| 145                           | 148          | 118 | 109 | 101 | 98  | 97  |
| 140                           | 145          | 116 | 107 | 99  | 96  | 94  |
| 135                           | 142          | 113 | 105 | 97  | 94  | 92  |
| 130                           | 139          | 111 | 102 | 95  | 92  | 89  |
| 125                           | 136          | 109 | 100 | 92  | 89  | 87  |
| 120                           | 133          | 106 | 98  | 90  | 87  | 84  |
| 115                           | 130          | 104 | 95  | 88  | 85  | 82  |
| 110                           | 126          | 101 | 93  | 86  | 83  | 80  |
| 105                           | 123          | 99  | 91  | 84  | 82  | 77  |
| 100                           | 120          | 96  | 89  | 82  | 80  | 75  |

| <b>Stick Shaker Speeds</b>    |              |     |     |     |     |     |
|-------------------------------|--------------|-----|-----|-----|-----|-----|
| Gross Weight<br>pounds x 1000 | Flap Setting |     |     |     |     |     |
|                               | up           | 5   | 15  | 25  | 30  | 40  |
| Stick Shaker Speed KIAS       |              |     |     |     |     |     |
| 170                           | 175          | 143 | 134 | 125 | 124 | 118 |
| 165                           | 173          | 141 | 132 | 123 | 122 | 116 |
| 160                           | 170          | 139 | 130 | 121 | 120 | 114 |
| 155                           | 167          | 137 | 128 | 119 | 117 | 112 |
| 150                           | 164          | 134 | 126 | 117 | 115 | 109 |
| 145                           | 162          | 132 | 124 | 115 | 113 | 107 |
| 140                           | 159          | 130 | 122 | 113 | 110 | 105 |
| 135                           | 156          | 127 | 120 | 111 | 108 | 103 |
| 130                           | 153          | 125 | 117 | 109 | 106 | 100 |
| 125                           | 150          | 123 | 115 | 107 | 103 | 98  |
| 120                           | 147          | 120 | 113 | 105 | 101 | 96  |
| 115                           | 144          | 118 | 111 | 102 | 98  | 94  |
| 110                           | 141          | 115 | 108 | 100 | 96  | 91  |
| 105                           | 138          | 112 | 106 | 98  | 93  | 89  |
| 100                           | 134          | 110 | 103 | 95  | 90  | 86  |

Speeds applicable to takeoff and landing altitudes only.

Values are based on most forward C.G.

## Boeing 727-200 Performance Handbook

### Temperature Conversion

Use the table to convert Total Air Temperature (TAT) to Outside Air Temperature (OAT).

| IND TAT -<br>°C | INDICATED MACH NUMBER |     |     |     |     |     |     |     |     |     |
|-----------------|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|                 | .30                   | .40 | .50 | .60 | .70 | .76 | .78 | .80 | .82 | .84 |
| 70              |                       |     |     | 47  | 39  | 34  | 33  | 31  | 29  | 28  |
| 65              |                       |     | 49  | 42  | 35  | 30  | 28  | 27  | 25  | 23  |
| 60              |                       | 50  | 44  | 38  | 30  | 25  | 24  | 22  | 21  | 19  |
| 55              | 49                    | 45  | 39  | 33  | 26  | 21  | 19  | 18  | 16  | 14  |
| 50              | 44                    | 40  | 35  | 28  | 21  | 17  | 15  | 13  | 12  | 10  |
| 45              | 39                    | 35  | 30  | 24  | 17  | 12  | 10  | 9   | 7   | 6   |
| 40              | 34                    | 30  | 25  | 19  | 12  | 8   | 6   | 4   | 3   | 1   |
| 35              | 30                    | 25  | 20  | 14  | 7   | 3   | 2   | 0   | -2  | -3  |
| 30              | 25                    | 21  | 16  | 10  | 3   | -1  | -3  | -4  | -6  | -7  |
| 25              | 20                    | 16  | 11  | 5   | -2  | -6  | -7  | -9  | -10 | -12 |
| 20              | 15                    | 11  | 6   | 0   | -6  | -10 | -12 | -13 | -15 | -16 |
| 15              | 10                    | 6   | 1   | -4  | -11 | -15 | -16 | -18 | -19 | -21 |
| 10              | 5                     | 1   | -3  | -9  | -15 | -19 | -21 | -22 | -24 | -25 |
| 5               | 0                     | -4  | -8  | -14 | -20 | -24 | -25 | -27 | -28 | -29 |
| 0               | -5                    | -8  | -13 | -18 | -24 | -28 | -30 | -31 | -32 | -34 |
| -5              | -10                   | -13 | -18 | -23 | -29 | -33 | -34 | -35 | -37 | -38 |
| -10             | -15                   | -18 | -23 | -28 | -33 | -37 | -39 | -40 | -41 | -43 |
| -15             | -20                   | -23 | -27 | -32 | -38 | -42 | -43 | -44 | -46 | -47 |
| -20             | -24                   | -28 | -32 | -37 | -43 | -46 | -47 | -49 | -50 | -51 |
| -25             | -29                   | -33 | -37 | -42 | -47 | -51 | -52 | -53 | -54 | -56 |
| -30             | -34                   | -38 | -42 | -46 | -52 | -55 | -56 | -58 | -59 | -60 |
| -35             | -39                   | -42 | -46 | -51 | -56 | -60 | -61 | -62 | -63 | -64 |
| -40             | -44                   | -47 | -51 | -56 | -61 | -64 | -65 | -66 | -68 | -69 |

### Altimeter and Airspeed Calibration

Corrections due to static port position error are minimal for Captain, F/O, and auxiliary static ports.

They are less than 1 knot, .001 Mach, or 20 feet of altitude for all flap positions between 1.2  $V_S$  and  $V_{MO}$ ,  $M_{MO}$  or  $V_{FE}$  as applicable. This is true with the landing gear retracted or extended, also in taxi attitude on the ground.

Since these corrections are so minimal, desired speed and altitude will be flown at that indicated value.

## Boeing 727-200 Performance Handbook

### **FLIGHT PLANNING**

This chapter contains flight planning data to determine trip fuel/time, and reserve fuel. The data includes engine bleed effects for normal air conditioning operation.

#### **Flight Planning Allowances**


Simplified Flight Planning charts enable rapid determination of estimated trip time and fuel from brake release to landing. Additional flight planning information including maneuver allowances is summarized below.

Fuel can be saved by minimizing APU utilization. Average APU fuel flow rates under normal operation are 230 lbs per hour on the ground.

Taxi fuel allowance is approximately 500 lbs.

#### **Optimum Altitude**

Optimum altitude for best fuel mileage is presented for .78M speed schedule.

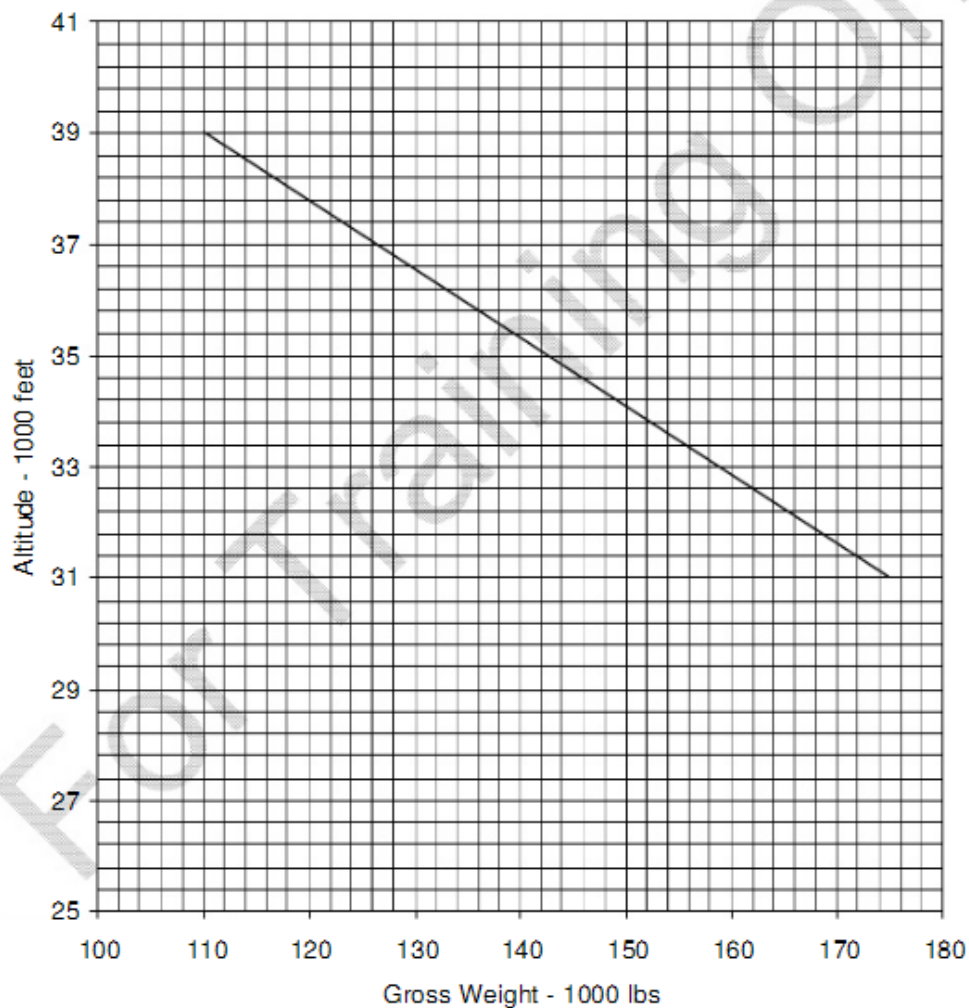

## Boeing 727-200 Performance Handbook

### Holding

This table provides total fuel flow information necessary for planning holding and reserve fuel requirements. The chart is based on a racetrack pattern in clean configuration and minimum drag airspeed.

| Pressure<br>Altitude<br>ft | Zero Fuel Weight - pounds x 1000 |      |      |      |
|----------------------------|----------------------------------|------|------|------|
|                            | 140                              | 130  | 120  | 110  |
|                            | Holding Fuel Flow- lbs/hr        |      |      |      |
| 9000                       | 6784                             | 6630 | 6508 | 6376 |
| 8000                       | 6850                             | 6702 | 6568 | 6442 |
| 7000                       | 6920                             | 6776 | 6634 | 6512 |
| 6000                       | 6992                             | 6852 | 6706 | 6586 |
| 5000                       | 7068                             | 6930 | 6786 | 6664 |
| 4000                       | 7148                             | 7010 | 6870 | 6746 |
| 3000                       | 7230                             | 7090 | 6960 | 6834 |
| 2000                       | 7318                             | 7174 | 7056 | 6924 |
| 1000                       | 7406                             | 7258 | 7158 | 7018 |
| 0                          | 7500                             | 7344 | 7266 | 7116 |

### Flight Time and Fuel Table

A Flight Time and Fuel Table is provided for .78M speed schedule at constant altitudes to determine trip time and trip fuel from brake release to touchdown.

APU usage, taxi, inflight flaps down maneuvering (other than straight in approach) and reserve fuel should be added to the trip fuel obtained from the table to obtain the total fuel required. These fuel allowances are presented under Flight Planning Allowances. Additional fuel for extended inflight traffic delays should be determined from the holding table.

#### Example:

Segment Distance = 800 NM  
 Flight Level = 330  
 Wind in FL 330 = 35 kts HW  
 Landing Weight = 130,000 lbs

#### Find:

TAS in FL 330 = 454 kts  
 Still Air Dist = 867 NAM

Flight Fuel from table = 18,253 lbs, LW correction = 800 lbs.  
 Flight Fuel = 19,053 lbs  
 Flight Time = 2:00 hrs



# Boeing 727-200 Performance Handbook

## Flight Time & Fuel Table

| STILL AIR<br>DISTANCE<br>(NAM) | FLIGHT LEVEL  |               |               |               |               |               |               |               |               |               |               |               |               |               |               |               |
|--------------------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
|                                | 90<br>285     | 110<br>407    | 130<br>419    | 150<br>431    | 170<br>444    | 190<br>456    | 210<br>470    | 230<br>474    | 250<br>470    | 270<br>466    | 290<br>462    | 310<br>458    | 330<br>454    | 350<br>450    | 370<br>447    | 390<br>447    |
| 100                            | 0:24<br>4.37  | 0:20<br>4.24  | 0:22<br>4.60  | 0:24<br>5.09  | 0:27<br>5.58  | 0:29<br>5.85  | 0:30<br>6.34  | 0:33<br>6.95  | 0:36<br>7.43  | 0:38<br>7.93  | 0:41<br>8.43  | 0:44<br>9.16  | 0:50<br>10.24 | 0:56<br>10.90 | 0:54<br>9.65  | 0:52<br>9.08  |
| 200                            | 0:45<br>6.59  | 0:35<br>6.78  | 0:34<br>6.70  | 0:33<br>7.24  | 0:33<br>6.63  | 0:32<br>6.50  | 0:32<br>6.60  | 0:33<br>6.95  | 0:36<br>7.43  | 0:38<br>7.93  | 0:41<br>8.43  | 0:44<br>9.16  | 0:50<br>10.24 | 0:56<br>10.90 | 0:54<br>9.65  | 0:52<br>9.08  |
| 300                            | 1:06<br>8.83  | 0:49<br>9.43  | 0:48<br>9.25  | 0:47<br>10.41 | 0:46<br>8.96  | 0:46<br>8.75  | 0:45<br>8.76  | 0:44<br>8.83  | 0:45<br>8.81  | 0:45<br>8.87  | 0:45<br>8.98  | 0:45<br>9.24  | 0:50<br>10.24 | 0:56<br>10.90 | 0:54<br>9.65  | 0:52<br>9.08  |
| 400                            | 1:27<br>11.07 | 1:04<br>12.09 | 1:03<br>11.80 | 1:01<br>13.60 | 1:00<br>11.30 | 0:59<br>11.00 | 0:57<br>10.93 | 0:57<br>10.93 | 0:57<br>10.77 | 0:58<br>10.69 | 0:58<br>10.67 | 0:58<br>10.82 | 0:59<br>11.18 | 0:59<br>11.22 | 0:59<br>10.20 | 0:59<br>9.74  |
| 500                            | 1:48<br>13.32 | 1:19<br>14.76 | 1:17<br>14.36 | 1:15<br>16.81 | 1:13<br>13.65 | 1:12<br>13.26 | 1:10<br>13.10 | 1:10<br>13.03 | 1:10<br>12.73 | 1:11<br>12.52 | 1:11<br>12.37 | 1:11<br>12.41 | 1:12<br>12.67 | 1:12<br>12.63 | 1:12<br>11.58 | 1:12<br>11.09 |
| 600                            | 2:09<br>15.59 | 1:34<br>17.45 | 1:31<br>16.94 | 1:29<br>20.03 | 1:27<br>16.01 | 1:25<br>15.53 | 1:23<br>15.29 | 1:22<br>15.15 | 1:23<br>14.71 | 1:23<br>14.37 | 1:24<br>14.09 | 1:24<br>14.02 | 1:25<br>14.18 | 1:25<br>14.06 | 1:26<br>12.97 | 1:26<br>12.46 |
| 700                            | 2:30<br>17.87 | 1:48<br>20.14 | 1:46<br>19.52 | 1:43<br>23.27 | 1:40<br>18.38 | 1:38<br>17.81 | 1:36<br>17.49 | 1:35<br>17.27 | 1:36<br>16.70 | 1:36<br>16.23 | 1:37<br>15.81 | 1:37<br>15.64 | 1:38<br>15.70 | 1:39<br>15.51 | 1:39<br>14.39 | 1:39<br>13.84 |
| 800                            | 2:51<br>20.16 | 2:03<br>22.85 | 2:00<br>22.11 | 1:57<br>26.52 | 1:54<br>20.76 | 1:51<br>20.10 | 1:48<br>19.69 | 1:48<br>19.41 | 1:48<br>18.70 | 1:49<br>18.10 | 1:50<br>17.55 | 1:51<br>17.27 | 1:51<br>17.23 | 1:52<br>16.98 | 1:53<br>15.82 | 1:53<br>15.24 |
| 900                            | 3:12<br>22.47 | 2:18<br>25.57 | 2:14<br>24.72 | 2:11<br>29.80 | 2:07<br>23.15 | 2:04<br>22.39 | 2:01<br>21.91 | 2:00<br>21.55 | 2:01<br>20.72 | 2:02<br>19.98 | 2:03<br>19.30 | 2:04<br>18.92 | 2:05<br>18.78 | 2:05<br>18.46 | 2:06<br>17.26 | 2:06<br>16.66 |
| 1000                           | 3:33<br>24.78 | 2:33<br>28.30 | 2:29<br>27.33 | 2:25<br>33.09 | 2:21<br>25.55 | 2:18<br>24.69 | 2:14<br>24.13 | 2:13<br>23.70 | 2:14<br>22.75 | 2:15<br>21.87 | 2:16<br>21.06 | 2:17<br>20.58 | 2:18<br>20.35 | 2:19<br>19.96 | 2:20<br>18.73 | 2:19<br>18.10 |
| 1100                           | 3:54<br>27.11 | 2:47<br>31.05 | 2:43<br>29.95 | 2:39<br>36.39 | 2:34<br>27.96 | 2:31<br>27.01 | 2:27<br>26.37 | 2:26<br>25.87 | 2:27<br>24.78 | 2:28<br>23.78 | 2:29<br>22.83 | 2:30<br>22.26 | 2:31<br>21.94 | 2:32<br>21.49 | 2:33<br>20.21 | 2:33<br>19.56 |
| 1200                           | 4:15<br>29.45 | 3:02<br>33.80 | 2:57<br>32.59 | 2:53<br>39.72 | 2:48<br>30.38 | 2:44<br>29.32 | 2:39<br>28.62 | 2:38<br>28.04 | 2:39<br>26.83 | 2:41<br>25.70 | 2:42<br>24.62 | 2:43<br>23.95 | 2:44<br>23.54 | 2:45<br>23.02 | 2:46<br>21.72 | 2:46<br>21.03 |
| 1300                           | 4:36<br>31.80 | 3:17<br>36.57 | 3:12<br>35.23 | 3:07<br>43.06 | 3:01<br>32.81 | 2:57<br>31.65 | 2:52<br>30.87 | 2:51<br>30.23 | 2:52<br>28.90 | 2:54<br>27.63 | 2:55<br>26.42 | 2:56<br>25.65 | 2:58<br>25.15 | 2:59<br>24.58 | 3:00<br>23.24 | 3:00<br>22.52 |
| 1400                           | 4:57<br>34.17 | 3:32<br>39.35 | 3:26<br>37.88 | 3:20<br>46.41 | 3:15<br>35.25 | 3:10<br>33.98 | 3:05<br>33.14 | 3:04<br>32.42 | 3:05<br>30.97 | 3:06<br>29.57 | 3:08<br>28.23 | 3:09<br>27.37 | 3:11<br>26.79 | 3:12<br>26.16 | 3:13<br>24.78 | 3:13<br>24.03 |
| 1500                           | 5:18<br>36.54 | 3:46<br>42.14 | 3:40<br>40.55 | 3:34<br>49.79 | 3:28<br>37.69 | 3:23<br>36.33 | 3:18<br>35.42 | 3:16<br>34.62 | 3:18<br>33.06 | 3:19<br>31.52 | 3:21<br>30.05 | 3:22<br>29.10 | 3:24<br>28.43 | 3:25<br>27.75 | 3:27<br>26.33 | 3:27<br>25.56 |
| 1600                           | 5:39<br>38.93 | 4:01<br>44.94 | 3:55<br>43.22 | 3:48<br>53.18 | 3:42<br>40.15 | 3:37<br>38.68 | 3:31<br>37.70 | 3:29<br>36.84 | 3:31<br>35.16 | 3:32<br>33.49 | 3:34<br>31.88 | 3:35<br>30.85 | 3:37<br>30.10 | 3:39<br>29.36 | 3:40<br>27.91 | 3:40<br>27.11 |
| 1700                           | 6:00<br>41.33 | 4:16<br>47.76 | 4:09<br>45.90 | 4:02<br>56.59 | 3:56<br>42.62 | 3:50<br>41.04 | 3:43<br>40.00 | 3:42<br>39.06 | 3:43<br>37.27 | 3:45<br>35.47 | 3:47<br>33.73 | 3:48<br>32.61 | 3:50<br>31.78 | 3:52<br>30.99 | 3:54<br>29.50 | 3:53<br>28.67 |
| 1800                           | 6:21<br>43.74 | 4:31<br>50.59 | 4:23<br>48.60 | 4:16<br>60.01 | 4:09<br>45.10 | 4:03<br>43.40 | 3:56<br>42.30 | 3:54<br>41.30 | 3:56<br>39.39 | 3:58<br>37.46 | 4:00<br>35.59 | 4:02<br>34.38 | 4:04<br>33.47 | 4:05<br>32.64 | 4:07<br>31.11 | 4:07<br>30.25 |
| 1900                           | 6:43<br>46.16 | 4:45<br>53.43 | 4:38<br>51.30 | 4:30<br>63.46 | 4:23<br>47.59 | 4:16<br>45.78 | 4:09<br>44.62 | 4:07<br>43.54 | 4:09<br>41.52 | 4:11<br>39.46 | 4:13<br>37.46 | 4:15<br>36.17 | 4:17<br>35.19 | 4:19<br>34.30 | 4:20<br>32.74 | 4:20<br>31.85 |
| 2000                           | 7:04<br>48.60 | 5:00<br>56.28 | 4:52<br>54.01 | 4:44<br>66.92 | 4:36<br>50.09 | 4:29<br>48.16 | 4:22<br>46.95 | 4:20<br>45.79 | 4:22<br>43.67 | 4:24<br>41.48 | 4:26<br>39.34 | 4:28<br>37.97 | 4:30<br>36.91 | 4:32<br>35.99 | 4:34<br>34.38 | 4:34<br>33.47 |

Based on: Landing Weight = 110,000 lbs  
 If actual landing weight is above 110,000 lbs, ADD a fuel burn correction of 200 lbs  
 for each 5,000 lbs increment of additional landing weight.

CLIMB: 250 / 300 / M.78      Still Air Distance:  
 CRUISE: 250 / 350 / M.78  
 DESCENT: 280 / M.78

$$SAD = NM \frac{V_{TAS}}{V_{TAS} \pm V_W}$$

Example: 

|     |       |
|-----|-------|
| 600 | 1:25  |
|     | 14.06 |

 - Flight Time from start of takeoff roll to landing (h:m)  
 - Flight Fuel from start of takeoff roll to landing (1000 lbs)

**TAKEOFF PERFORMANCE**

**Introduction**

This chapter contains data to determine takeoff performance limitations, based on engine bleed effects for normal air conditioning operation and antiice off, i.e., two packs on, one pack bleed from each engine. The data is presented in simplified form and is therefore conservative. In the event of any conflict between data presented in this section and those contained in the Approved Airplane Flight Manual, the Flight Manual shall always take precedence.

**Performance Limited Takeoff Weight**

The Performance Limited Takeoff Weight (PTOW) is the least of the field length, climb, and tire speed limit weights.

**Altimeter Setting To Station Pressure**

The determination of thrust setting and takeoff/landing performance generally requires station pressure altitude. If station pressure or station pressure altitude are not available, enter the chart with altimeter setting (QNH) and read the pressure altitude adjustment. Apply this adjustment to the station elevation to obtain station pressure altitude.

For boundary QNH values, read the midpoint between tabulated adjustments to elevation, e.g., for QNH of 29.66 inches (1004 mb), the elevation adjustment is 250 ft. Alternatively, station pressure altitude may be determined by setting the cockpit altimeter to 29.92 inches (1013.2 mb); the altimeter will then read pressure altitude.

**Wind Component**

The Wind Component chart provides crosswind and head/tail wind components, appropriate to the runway headings, reported wind velocity and direction. To use the chart, find the intersection between reported wind velocity in knots (circular lines) and the angle in degrees between reported wind direction and the runway (radial lines). Then read head/tail wind component to the left and crosswind component from the bottom scale.


**Boeing 727-200 Performance Handbook**

**PERFORMANCE LIMITED TAKEOFF WEIGHT DETERMINATION PROCEDURE**

Atmospheric Conditions:  
 - QNH  
 - OAT  
 - Wind

Runway Characteristics:  
 - Field Length Available  
 - Slope  
 - Field Elevation


1. With Wind, Slope, and Field Length Available enter Field Length Correction Chart (5.3.5) and obtain Corrected Field Length.
2. With QNH and Field Elevation enter Altimeter Setting to Station Pressure Table (5.3.3) and obtain Pressure Altitude.
3. With Corrected Field Length (step 1), OAT, and Pressure Altitude (step 2) enter Takeoff Field Limit Chart (5.3.6) and obtain Field Length Limited Takeoff Weight. Adjust for Bleed Configuration.
4. With OAT and Pressure Altitude (step 2) enter Takeoff Climb Limit Chart (5.3.7) and obtain Climb Limited Takeoff Weight. Adjust for Bleed Configuration.
5. With OAT and Pressure Altitude (step 2) enter Tire Speed Limited Weight Chart (5.3.8) and obtain Tire Speed Limited Weight. Adjust obtained weight for wind.
6. Compare the obtained limiting weights from steps 3, 4, and 5. Use the SMALLER one as the Performance Limited Takeoff Weight.

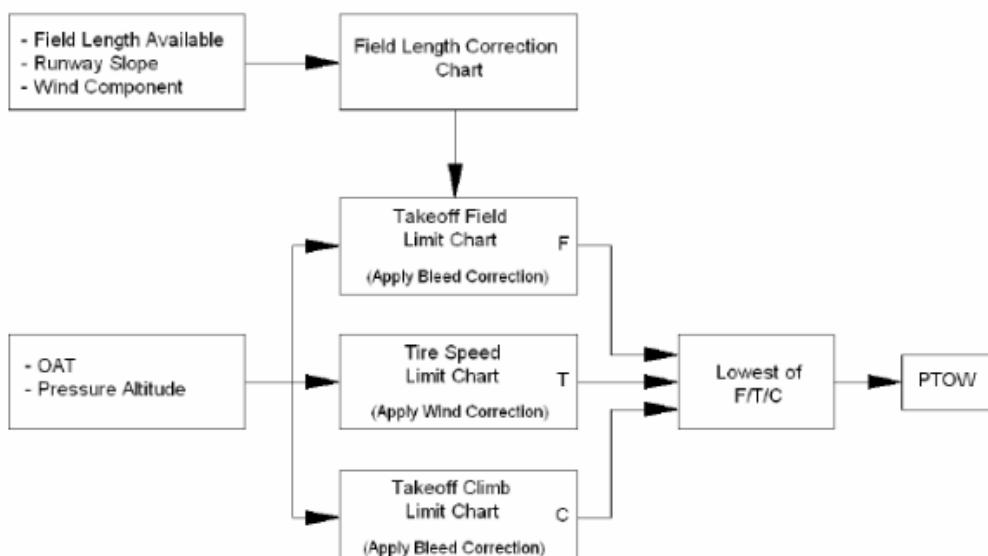

Boeing 727-200 Performance Handbook  
ALTIMETER SETTING TO STATION PRESSURE

| QNH IN. HG.    | Correction to Elevation for Pressure Altitude | QNH MILLIBARS |
|----------------|---|---------------|
| 28.81 to 28.91 | 1000  | 976 to 979    |
| 28.91 to 29.02 | 900   | 979 to 983    |
| 29.02 to 29.12 | 800   | 983 to 986    |
| 29.12 to 29.23 | 700   | 986 to 990    |
| 29.23 to 29.34 | 600   | 990 to 994    |
| 29.34 to 29.44 | 500   | 994 to 997    |
| 29.44 to 29.55 | 400   | 997 to 1001   |
| 29.55 to 29.66 | 300   | 1001 to 1004  |
| 29.66 to 29.76 | 200   | 1004 to 1008  |
| 29.76 to 29.87 | 100   | 1008 to 1012  |
| 29.87 to 29.97 | 0   | 1012 to 1015  |
| 29.97 to 30.08 | -100  | 1015 to 1019  |
| 30.08 to 30.19 | -200  | 1019 to 1022  |
| 30.19 to 30.30 | -300  | 1022 to 1026  |
| 30.30 to 30.41 | -400  | 1026 to 1030  |
| 30.41 to 30.52 | -500  | 1030 to 1034  |
| 30.52 to 30.63 | -600  | 1034 to 1037  |
| 30.63 to 30.74 | -700  | 1037 to 1041  |

Boeing 727-200 Performance Handbook  
WIND COMPONENT

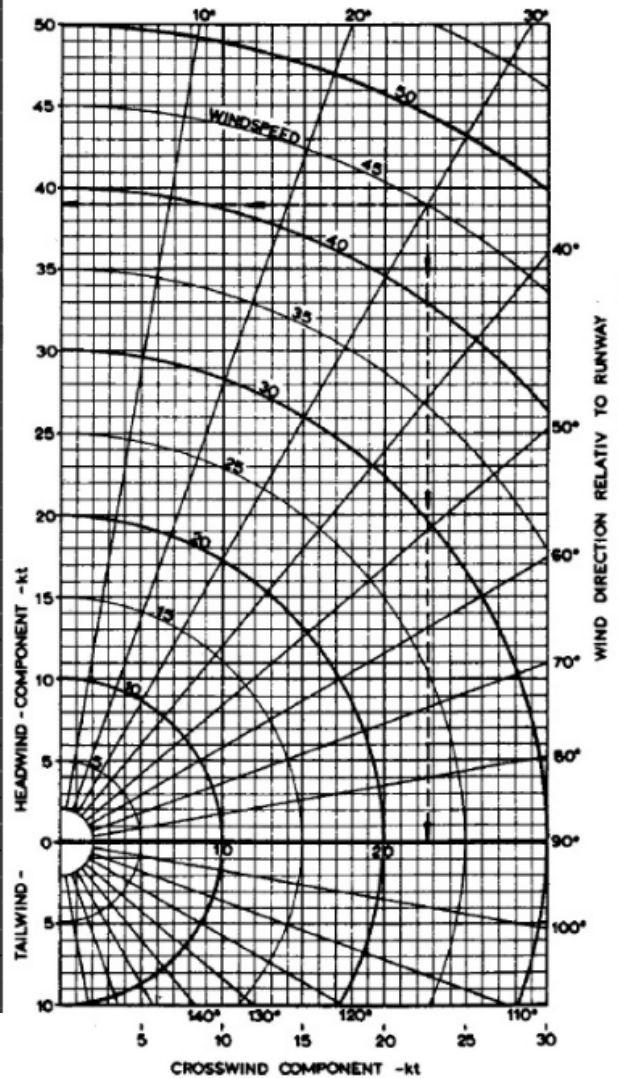



## Boeing 727-200 Performance Handbook

### Takeoff Field Corrections

Enter the chart with field length available and correct for slope and wind.

### Takeoff Field Limit

Maximum field length limited brake release weights are presented for all certified takeoff flap settings. The field length available is the amount of paved surface which may be used to accelerate to the decision speed and either stop at the end of the runway or climb to 35 ft. The field limited weight does not account for clearway or stopway. The reference takeoff condition is flap position 15, zero slope, and zero wind. To determine the field length limit brake release weight, enter the chart with OAT, move horizontally to airport pressure altitude and project a line vertically down. Now enter the chart with the Field Length corrected for wind and slope and move horizontally until the vertically line from the airport pressure altitude is intersected. At the intersection of both lines read the Field Length Limited Weight.

Adjust the field length limit weight according to the notes below the chart to account for the appropriate engine bleed configuration.

### Takeoff Climb Limit

Maximum climb limited brake release weights are presented for all certified takeoff flap settings. The weights are limited by second segment climb performance and do not account for obstacles.

To determine the climb limit weight, enter the chart with OAT, move vertically to airport pressure altitude. Move horizontally and read the climb limit weight to the left. Adjust the climb limit weight according to the notes below the chart to account for the appropriate engine bleed configuration.

### Tire Speed Limited Weight

Maximum Tire Speed Limited Weights are presented for one certified takeoff flap setting. The weights are limited by tire speed limit and are based on zero slope and zero wind conditions.


To determine the tire speed limit weight, enter the chart with OAT, move vertically to airport pressure altitude. Move horizontally and read the tire speed limit weight to the left. Adjust the tire speed limit weight according to the notes below the chart to account for wind and different tires.

# FIELD LENGTH CORRECTION


Example:

Field Length Available = 6700 ft, Runway Slope = 1% downhill, and Wind Component = 0 kts.


Find: Corrected Field Length = 7000 ft

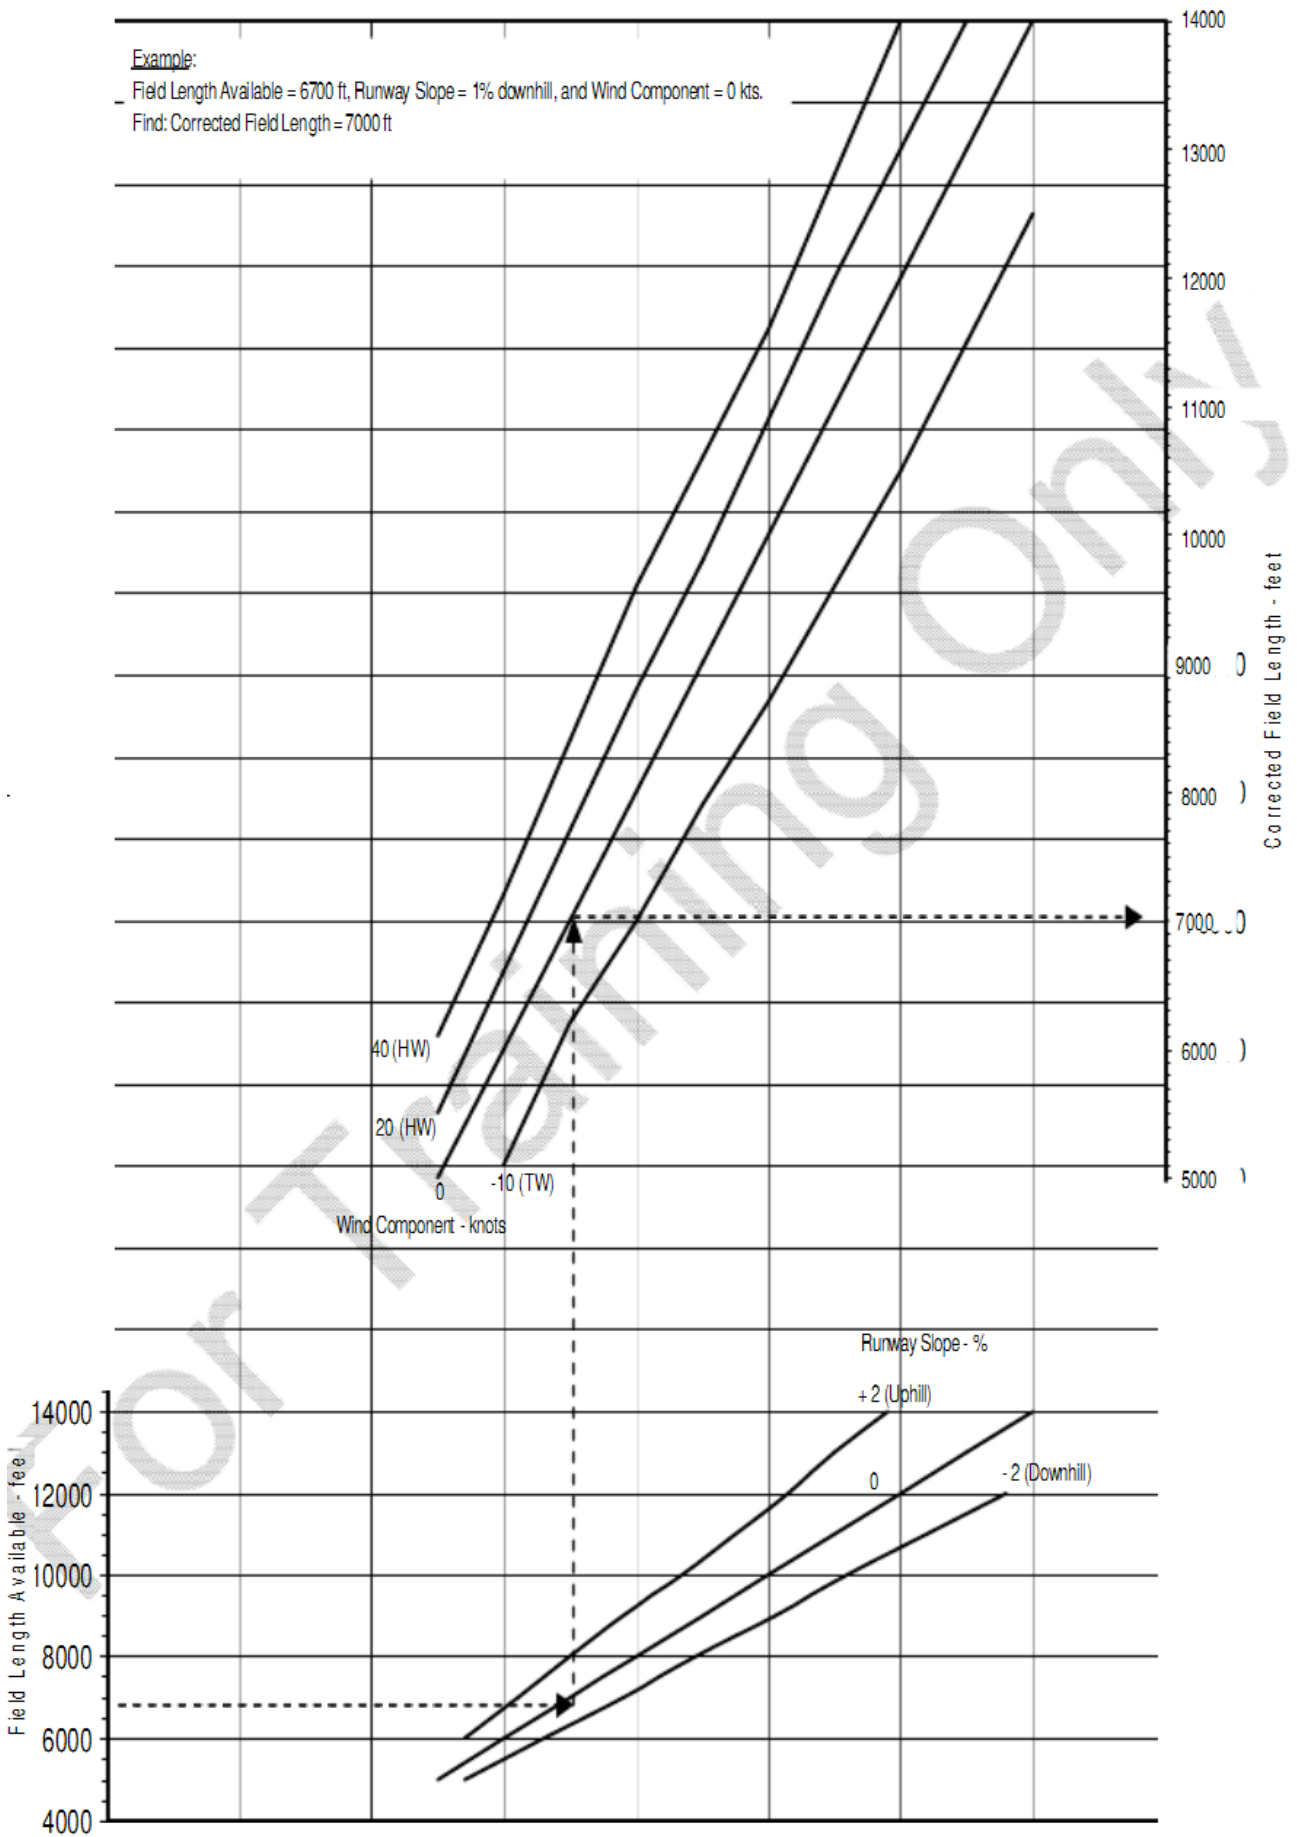

# TAKEOFF FIELD LIMIT FLAPS 15

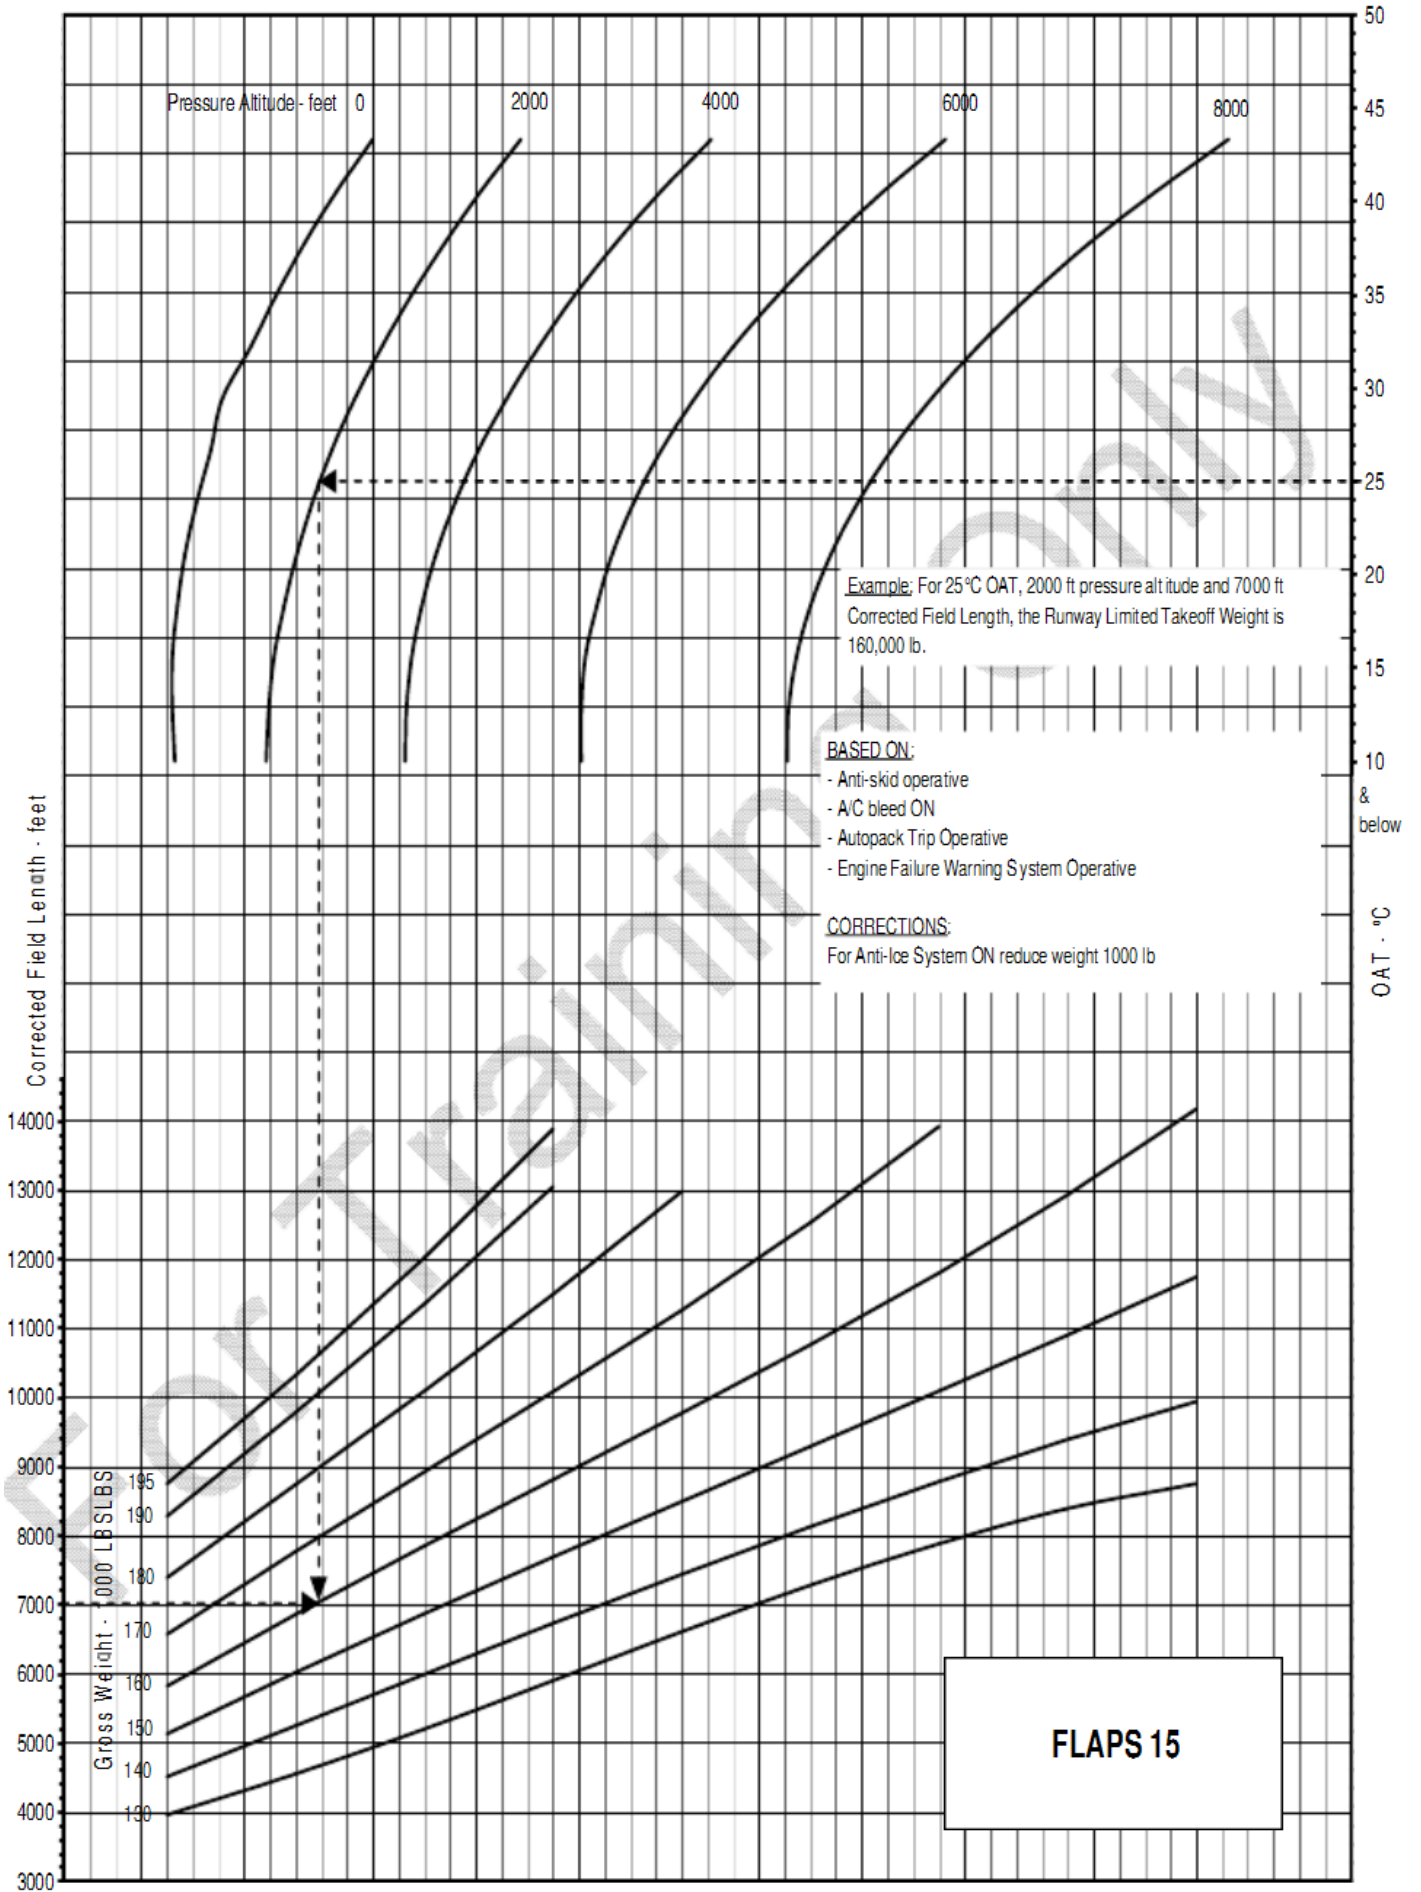

# TAKEOFF CLIMB LIMIT FLAPS 15

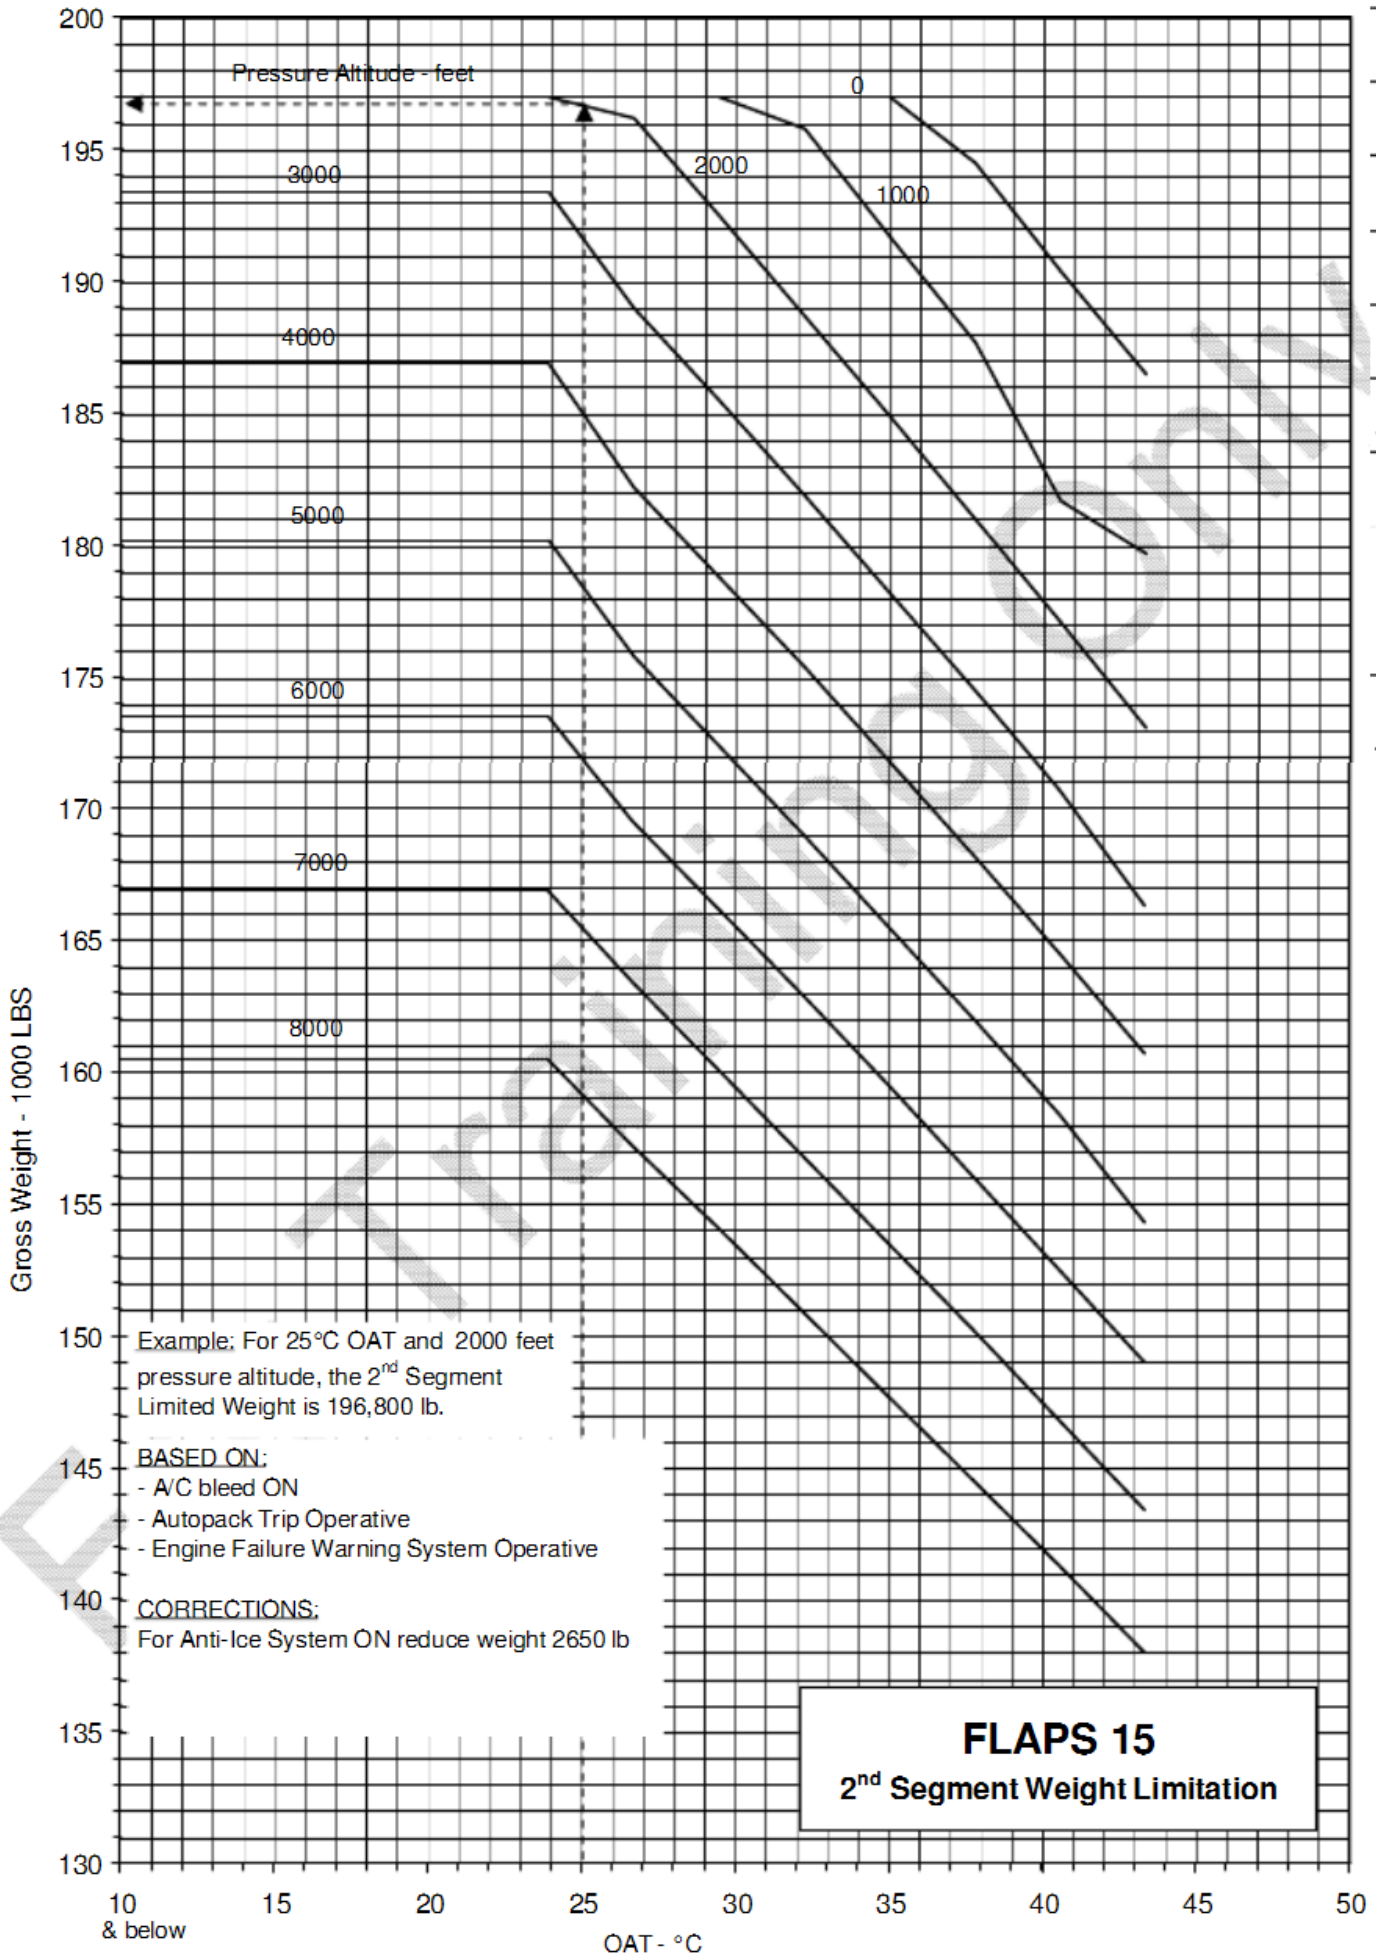

**Takeoff Speeds**

The speeds presented in the Takeoff Speeds table can be used for all performance conditions except where adjustments must be made to V1 for clearway, stopway, brake deactivation, improved climb, contaminated runway situations, unbalanced for brake energy or obstacle clearance with unbalanced V1. These speeds may be used for weights less than or equal to the performance limited weight.

Normal takeoff speeds, V1, VR, and V2, with anti-skid on, are read from the table by entering with takeoff flap setting, brake release weight, and appropriate column.

| Press<br>Alt 1000<br>ft | OAT          |            |            |            |           |         |     |         |     |  |
|-------------------------|--------------|------------|------------|------------|-----------|---------|-----|---------|-----|--|
|                         | °F           |            | -65 to -14 | -13 to 33  | 34 to 86  |         |     |         |     |  |
| 9 to 10                 | °C           |            | -54 to -26 | -25 to 0   | 1 to 30   |         |     |         |     |  |
| 7 to 9                  | °F           | -65 to -36 | -35 to 112 | 13 to 75   | 76 to 100 |         |     |         |     |  |
|                         | °C           | -54 to -38 | -37 to -11 | -10 to 24  | 25 to 38  |         |     |         |     |  |
| 5 to 7                  | °F           | 65 to 2    | 3 to 40    | 41 to 96   | 97 to 109 |         |     |         |     |  |
|                         | °C           | -54 to -17 | -16 to 4   | 5 to 35    | 36 to 42  |         |     |         |     |  |
| 3 to 5                  | °F           | -65 to 32  | 33 to 88   | 89 to 112  |           |         |     |         |     |  |
|                         | °C           | -54 to 0   | 1 to 31    | 32 to 44   |           |         |     |         |     |  |
| 1 to 3                  | °F           | -65 to 84  | 85 to 104  | 105 to 120 |           |         |     |         |     |  |
|                         | °C           | -54 to 29  | 30 to 40   | 41 to 49   |           |         |     |         |     |  |
| -1 to 1                 | °F           | -65 to 100 | 101 to 120 |            |           |         |     |         |     |  |
|                         | °C           | -54 to 38  | 39 to 49   |            |           |         |     |         |     |  |
| FLAPS                   | WEIGHT<br>lb | V1 = VR    | V2         | V1 = VR    | V2        | V1 = VR | V2  | V1 = VR | V2  |  |
| 5                       | 210000       | 165        | 175        | 167        | 175       |         |     |         |     |  |
|                         | 200000       | 159        | 170        | 161        | 170       |         |     |         |     |  |
|                         | 190000       | 154        | 166        | 156        | 166       | 158     | 166 |         |     |  |
|                         | 180000       | 148        | 161        | 150        | 161       | 152     | 161 |         |     |  |
|                         | 170000       | 142        | 157        | 144        | 157       | 146     | 156 | 148     | 156 |  |
|                         | 160000       | 137        | 151        | 138        | 151       | 140     | 156 | 142     | 150 |  |
|                         | 150000       | 131        | 146        | 132        | 146       | 133     | 145 | 136     | 144 |  |
|                         | 140000       | 128        | 143        | 129        | 143       | 129     | 142 | 131     | 142 |  |
| 130000                  | 125          | 141        | 126        | 141        | 127       | 140     | 129 | 140     |     |  |
| 120000                  | 119          | 136        | 120        | 135        | 121       | 134     | 122 | 133     |     |  |
| 15                      | 210000       | 155        | 166        | 157        | 166       |         |     |         |     |  |
|                         | 200000       | 150        | 161        | 152        | 161       |         |     |         |     |  |
|                         | 190000       | 145        | 157        | 147        | 157       | 149     | 157 |         |     |  |
|                         | 180000       | 139        | 152        | 141        | 152       | 143     | 152 |         |     |  |
|                         | 170000       | 134        | 148        | 136        | 148       | 138     | 147 | 140     | 147 |  |
|                         | 160000       | 129        | 143        | 130        | 143       | 132     | 143 | 134     | 142 |  |
|                         | 150000       | 123        | 138        | 124        | 138       | 126     | 137 | 128     | 137 |  |
|                         | 140000       | 121        | 137        | 122        | 136       | 123     | 135 | 125     | 134 |  |
| 130000                  | 118          | 134        | 119        | 133        | 120       | 132     | 122 | 132     |     |  |
| 120000                  | 112          | 128        | 113        | 128        | 114       | 127     | 115 | 126     |     |  |
| 20                      | 210000       | 150        | 161        | 152        | 161       |         |     |         |     |  |
|                         | 200000       | 145        | 157        | 147        | 157       |         |     |         |     |  |
|                         | 190000       | 140        | 152        | 142        | 152       | 144     | 152 |         |     |  |
|                         | 180000       | 135        | 148        | 137        | 148       | 139     | 148 |         |     |  |
|                         | 170000       | 130        | 144        | 131        | 144       | 133     | 143 | 135     | 143 |  |
|                         | 160000       | 125        | 139        | 126        | 139       | 128     | 138 | 130     | 138 |  |
|                         | 150000       | 119        | 134        | 120        | 134       | 122     | 133 | 124     | 133 |  |
|                         | 140000       | 116        | 131        | 117        | 131       | 118     | 130 | 120     | 130 |  |
| 130000                  | 114          | 129        | 115        | 129        | 116       | 128     | 118 | 128     |     |  |
| 120000                  | 109          | 124        | 109        | 124        | 110       | 123     | 111 | 122     |     |  |
| 25                      | 210000       | 143        | 155        | 146        | 155       |         |     |         |     |  |
|                         | 200000       | 141        | 152        | 143        | 152       |         |     |         |     |  |
|                         | 190000       | 136        | 148        | 138        | 148       | 139     | 148 |         |     |  |
|                         | 180000       | 130        | 144        | 132        | 144       | 134     | 144 |         |     |  |
|                         | 170000       | 125        | 139        | 127        | 139       | 129     | 139 | 131     | 139 |  |
|                         | 160000       | 120        | 135        | 122        | 135       | 124     | 134 | 125     | 134 |  |
|                         | 150000       | 115        | 130        | 116        | 130       | 118     | 130 | 120     | 129 |  |
|                         | 140000       | 112        | 128        | 113        | 127       | 114     | 127 | 116     | 127 |  |
| 130000                  | 110          | 126        | 111        | 125        | 112       | 125     | 114 | 125     |     |  |
| 120000                  | 105          | 121        | 106        | 120        | 106       | 120     | 107 | 119     |     |  |



**Takeoff EPR and N1**

| TAKEOFF EPR                               |                 |           |      |      |       |      |      |      |      |      |      |      |      |      |      |      |  |
|---|-----------------|-----------|------|------|-------|------|------|------|------|------|------|------|------|------|------|------|--|
| PRESS<br>ALT                              | OAT<br>°F<br>°C | -4        | 5    | 14   | 23    | 32   | 41   | 50   | 59   | 68   | 77   | 86   | 95   | 104  | 113  | 120  |  |
|   |                 | -20       | -15  | -10  | -5    | 0    | 5    | 10   | 15   | 20   | 25   | 30   | 35   | 40   | 45   | 49   |  |
| -1000                                     | 1 & 3           | 2.04      | 2.04 | 2.04 | 2.04  | 2.04 | 2.04 | 2.04 | 2.04 | 2.04 | 2.04 | 2.04 | 2.03 | 1.99 | 1.94 | 1.91 |  |
|   | 2               | 2.06      | 2.06 | 2.06 | 2.06  | 2.06 | 2.06 | 2.06 | 2.06 | 2.06 | 2.06 | 2.06 | 2.05 | 2.00 | 1.96 | 1.92 |  |
| S.L.                                      | 1 & 3           | 2.10      | 2.10 | 2.10 | 2.10  | 2.10 | 2.10 | 2.10 | 2.10 | 2.10 | 2.10 | 2.08 | 2.03 | 1.99 | 1.94 | 1.91 |  |
|   | 2               | 2.11      | 2.11 | 2.11 | 2.11  | 2.11 | 2.11 | 2.11 | 2.11 | 2.11 | 2.11 | 2.10 | 2.05 | 2.00 | 1.96 | 1.92 |  |
| 1000                                      | 1 & 3           | 2.15      | 2.15 | 2.15 | 2.15  | 2.15 | 2.15 | 2.13 | 2.12 | 2.12 | 2.11 | 2.08 | 2.03 | 1.99 | 1.94 | 1.91 |  |
|   | 2               | 2.16      | 2.16 | 2.16 | 2.16  | 2.16 | 2.16 | 2.15 | 2.13 | 2.13 | 2.12 | 2.10 | 2.05 | 2.00 | 1.96 | 1.92 |  |
| 2000                                      | 1 & 3           | 2.21      | 2.21 | 2.21 | 2.21  | 2.21 | 2.20 | 2.17 | 2.14 | 2.14 | 2.14 | 2.11 | 2.08 | 2.03 | 1.99 | 1.91 |  |
|   | 2               | 2.22      | 2.22 | 2.22 | 2.22  | 2.22 | 2.21 | 2.18 | 2.16 | 2.16 | 2.15 | 2.12 | 2.10 | 2.05 | 2.00 | 1.96 |  |
| 3000                                      | 1 & 3           | 2.26      | 2.26 | 2.26 | 2.25  | 2.23 | 2.20 | 2.17 | 2.14 | 2.14 | 2.14 | 2.11 | 2.08 | 2.03 | 1.99 | 1.91 |  |
|   | 2               | 2.28      | 2.28 | 2.28 | 2.27  | 2.24 | 2.21 | 2.18 | 2.16 | 2.16 | 2.15 | 2.12 | 2.10 | 2.05 | 2.00 | 1.96 |  |
| 3856 &<br>ABOVE                           | 1 & 3           | 2.31      | 2.29 | 2.27 | 2.25  | 2.23 | 2.20 | 2.17 | 2.14 | 2.14 | 2.14 | 2.11 | 2.08 | 2.03 | 1.99 | 1.91 |  |
|   | 2               | 2.32      | 2.31 | 2.29 | 2.27  | 2.24 | 2.21 | 2.18 | 2.16 | 2.16 | 2.15 | 2.12 | 2.10 | 2.05 | 2.00 | 1.96 |  |
| EPR BLEED CORRECTIONS                     |                 | ENG 1 & 3 |      |      | ENG 2 |      |      |      |      |      |      |      |      |      |      |      |  |
| AIR CONDITIONING                          |                 | OFF +.04  |      |      | -     |      |      |      |      |      |      |      |      |      |      |      |  |
| ENGINE A/I ON                             |                 | ZERO      |      |      | -0.3  |      |      |      |      |      |      |      |      |      |      |      |  |
| IN SHADED AREA COLDER<br>THAN 0°F (-18°C) |                 | -0.3      |      |      | -0.6  |      |      |      |      |      |      |      |      |      |      |      |  |
| MOD 'A' INLET                             |                 | -         |      |      | 0.1   |      |      |      |      |      |      |      |      |      |      |      |  |

**STABILIZER TRIM SETTING**

| CG % | FLAPS                  |         |       |
|------|------------------------|---------|-------|
|      | 5                      | 15 / 20 | 25    |
|      | UNITS AIRPLANE NOSE UP |         |       |
| 10   | 6 3/4                  | 7 1/2   | 8 1/4 |
| 12   | 6 1/2                  | 7 1/4   | 8     |
| 14   | 6 1/4                  | 7       | 7 3/4 |
| 16   | 6                      | 6 3/4   | 7 1/2 |
| 18   | 5 3/4                  | 6 1/2   | 7     |
| 20   | 5 1/2                  | 6       | 6 1/2 |
| 22   | 5                      | 5 3/4   | 6 1/4 |
| 24   | 4 3/4                  | 5 1/4   | 5 3/4 |
| 26   | 4 1/2                  | 4 3/4   | 5 1/4 |
| 28   | 4                      | 4 1/2   | 4 3/4 |
| 30   | 3 3/4                  | 4       | 4 1/4 |
| 32   | 3 1/2                  | 3 3/4   | 4     |
| 34   | 3 1/4                  | 3 1/4   | 3 1/2 |
| 36   | 2 3/4                  | 3       | 3     |
| 38   | 2 1/2                  | 2 1/2   | 2 1/2 |
| 40   | 2 1/2                  | 2 1/2   | 2 1/2 |
| 42   | 2 1/2                  | 2 1/2   | 2 1/2 |

| TAKEOFF N1         |          |      |      |      |      |      |      |      |      |                 |      |      |      |      |      |               |      |      |      |      |      |      |
|--------------------|----------|------|------|------|------|------|------|------|------|-----------------|------|------|------|------|------|---------------|------|------|------|------|------|------|
| PRESS<br>ALT       | OAT - °C |      |      |      |      |      |      |      |      |                 |      |      |      |      |      |               |      |      |      |      |      |      |
|                    | -40      | -35  | -29  | -23  | -18  | -12  | -7   | -1   | 4    | 10              | 16   | 18   | 21   | 24   | 27   | 29            | 32   | 35   | 38   | 41   | 43   | 49   |
| -1000              | 82.2     | 83.2 | 84.2 | 85.1 | 86.1 | 87.0 | 87.9 | 88.8 | 89.7 | 90.6            | 91.5 | 92.0 | 92.4 | 92.8 | 93.2 | 93.7          | 94.1 | 94.2 | 93.7 | 93.3 | 92.9 | 92.0 |
| S.L.               | 83.5     | 84.5 | 85.5 | 86.5 | 87.4 | 88.3 | 89.3 | 90.2 | 91.1 | 92.0            | 93.0 | 93.4 | 93.9 | 94.3 | 94.7 | 95.0          | 94.6 | 94.2 | 93.7 | 93.3 | 92.9 | 92.0 |
| 1000               | 85.4     | 86.4 | 87.3 | 88.3 | 89.2 | 90.2 | 91.1 | 92.0 | 92.9 | 93.3            | 93.0 | 93.4 | 93.9 | 94.3 | 94.7 | 95.0          | 94.6 | 94.2 | 93.7 | 93.3 | 92.9 | 92.0 |
| 2000               | 68.8     | 67.8 | 68.9 | 69.9 | 70.9 | 71.9 | 72.8 | 73.8 | 73.6 | 73.3            | 73.0 | 73.4 | 73.9 | 74.3 | 74.7 | 75.0          | 74.6 | 74.2 | 73.7 | 73.3 | 72.9 | 72.0 |
| 3000               | 88.4     | 89.5 | 90.5 | 91.5 | 92.5 | 93.5 | 94.0 | 93.8 | 93.6 | 93.3            | 93.0 | 93.4 | 93.9 | 94.3 | 94.7 | 95.0          | 94.6 | 94.2 | 93.7 | 93.3 | 92.9 | 92.0 |
| 4000               | 90.1     | 91.2 | 92.3 | 93.3 | 94.0 | 94.0 | 94.0 | 93.8 | 93.6 | 93.3            | 93.0 | 93.4 | 93.9 | 94.3 | 94.7 | 95.0          | 94.6 | 94.2 | 93.7 | 93.3 | 92.9 | 92.0 |
| 5000               | 92.0     | 93.1 | 93.7 | 93.9 | 94.0 | 94.0 | 94.0 | 93.8 | 93.6 | 93.3            | 93.0 | 93.4 | 93.9 | 94.3 | 94.7 | 95.0          | 94.6 | 94.2 | 93.7 | 93.3 | 92.9 | 92.0 |
| 5660               | 93.2     | 93.5 | 93.7 | 93.9 | 94.0 | 94.0 | 94.0 | 93.8 | 93.6 | 93.3            | 93.0 | 93.4 | 93.9 | 94.3 | 94.7 | 95.0          | 94.6 | 94.2 | 93.7 | 93.3 | 92.9 | 92.0 |
| ADJUSTMENTS:       |          |      |      |      |      |      |      |      |      |                 |      |      |      |      |      |               |      |      |      |      |      |      |
| ENGINE ANTI-ICE ON |          |      |      |      |      |      |      |      |      | -No. 1&3 + 0.7% |      |      |      |      |      | -No. 2 + 0.2% |      |      |      |      |      |      |

**Distance, Time and Fuel**

Distance, time, and fuel for climb are shown for a 250/300/.78M climb speed schedule. Enter the table with top of climb flight level and read distance, time, and fuel required.

**Based on: 250 / 300 / M.78 Climb**

**Economic Climb Speeds**

Economic climb speeds are presented as a function of gross weight.

| Gross Weight<br>lb | Speed<br>knots<br>IAS |
|--------------------|-----------------------|
| 120000             | 280                   |
| 130000             | 285                   |
| 140000             | 290                   |
| 150000             | 295                   |
| 160000             | 300                   |
| 170000             | 305                   |
| 180000             | 310                   |
| 190000             | 315                   |
| 200000             | 320                   |
| 210000             | 325                   |

| FL  | Distance<br>NM | Time<br>min | Fuel<br>lbs |
|-----|----------------|-------------|-------------|
| 90  | 33             | 7           | 2646        |
| 110 | 54             | 8           | 3086        |
| 130 | 63             | 9           | 3417        |
| 150 | 72             | 10          | 3858        |
| 170 | 89             | 12          | 4299        |
| 190 | 99             | 13          | 4519        |
| 210 | 110            | 14          | 4960        |
| 230 | 126            | 16          | 5512        |
| 250 | 141            | 18          | 5952        |
| 270 | 155            | 20          | 6393        |
| 290 | 169            | 22          | 6834        |
| 310 | 191            | 25          | 7496        |
| 330 | 227            | 30          | 8488        |
| 350 | 263            | 35          | 9149        |
| 370 | 238            | 32          | 7937        |
| 390 | 224            | 30          | 7385        |

**DESCENT**

Distance and time for descent are shown for a .78M/280 KIAS descent speed schedule. Enter the table with top of descent pressure altitude and read distance in nautical miles and time in minutes.

| Press. Altitude feet | Distance NM | Time min | Fuel lbs |
|----------------------|-------------|----------|----------|
| 41000                | 133         | 23.6     | 1711     |
| 39000                | 127         | 22.8     | 1684     |
| 37000                | 121         | 22.1     | 1654     |
| 35000                | 115         | 21.3     | 1622     |
| 33000                | 109         | 20.6     | 1588     |
| 31000                | 104         | 19.9     | 1552     |
| 29000                | 98          | 19.2     | 1513     |
| 27000                | 93          | 18.6     | 1474     |
| 25000                | 88          | 18.0     | 1436     |
| 23000                | 83          | 17.4     | 1399     |
| 21000                | 78          | 16.7     | 1355     |
| 19000                | 72          | 16.0     | 1308     |
| 17000                | 66          | 15.2     | 1259     |
| 15000                | 60          | 14.4     | 1210     |
| 13000                | 54          | 13.7     | 1162     |
| 11000                | 49          | 12.9     | 1112     |
| 9000                 | 36          | 10.6     | 1019     |
| 7000                 | 30          | 9.4      | 974      |
| 5000                 | 25          | 8.2      | 924      |
| 3000                 | 18          | 6.5      | 848      |

**.78M / 280 knot descent**

Based on:

- Idle power on all engines throughout descent down to initial approach configuration
- Cruise Mach 0.78 to to crossover then 350 knots to 10000 feet
- 250 knots or less below 10000 feet
- Clean configuraton above 2000 feet
- Add 120 pounds fuel bum for each minute of terminal area maneuvering

**LANDING PERFORMANCE**

Charts are provided for determining the maximum landing weight as limited by field length or climb requirements for flap positions 30 and 40. Maximum performance landing weight is the smaller of the field length limit weight and climb limit weight; do not exceed maximum structural landing weight.

Normally the flap setting for landing is 30 degrees. A flap 30 landing is required when the airport elevation is above 2000 ft.

The use of flap 40 is recommended when landing under adverse conditions such as:

- Slippery Runway
- Runway Length 7000 ft or less
- Braking action reported less then good

**Landing Field Length Limitation**

To determine the landing field length rquired enter the chart with gross weight and airport pressure altitude and read field length required.

Charts are provided for DRY and WET runway conditions.

**Landing Climb Limitation**

Enter table with OAT and airport pressure altitude and read climb limited gross weight.

**Landing Speeds**

**Flaps 30**

| Weight lb | Vref kn |
|-----------|---------|
| 160000    | 137     |
| 155000    | 135     |
| 150000    | 132     |
| 145000    | 130     |
| 140000    | 128     |
| 135000    | 126     |
| 130000    | 123     |
| 125000    | 121     |
| 120000    | 118     |
| 115000    | 116     |
| 110000    | 113     |
| 105000    | 111     |

**Flaps 40**

| Weight lb | Vref kn |
|-----------|---------|
| 145000    | 126     |
| 140000    | 123     |
| 135000    | 121     |
| 130000    | 119     |
| 125000    | 117     |
| 120000    | 114     |
| 115000    | 112     |
| 110000    | 109     |
| 105000    | 107     |
| 100000    | 104     |

# Boeing 727-200 Performance Handbook

